

Product Mark


Model: G9 4000K LedStore.fi
Temperature: 20□
Tester: LedStore.fi

Manufacture: LedStore.fi
Humidity: 65%
Test Date: 2018-08-02


Parameter

Name	Value	Name	Value	Name	Value
E(lx)	225.36	Ra	94.8	Bink Freq(Hz)	-
CCT(K)	3638	S/P	1.7	Fluctuate Depth	-
Duv	-0.0020	X	342.5	Bink Percent	-
CIE(x,y)	0.3959, 0.3815	Y	330.0	Bink Exponent	-
CIE(u,v)	0.2334, 0.3373	Z	192.5	PAR(W/m2)	-
Dominant Wave(nm)	581.3	Rf	-	PPFD(umol/m2/s)	-
Purity	33.3%	Rg	-	YPFD(umol/m2/s)	-
Color Ratio(RGB)	21.3% 76.0% 2.7%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	622.8			Eb(W/m2)	-
Half Width(nm)	189.9			Ey(W/m2)	-
Candle E(fc)	20.94			Er(W/m2)	-
Ee(W/m2)	0.807			Erb Ratio	



Spectrogram

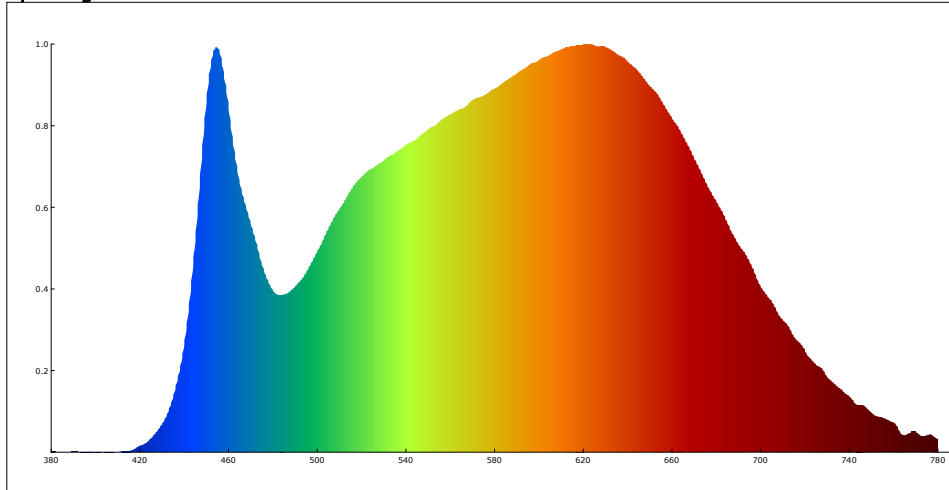

CIE1931

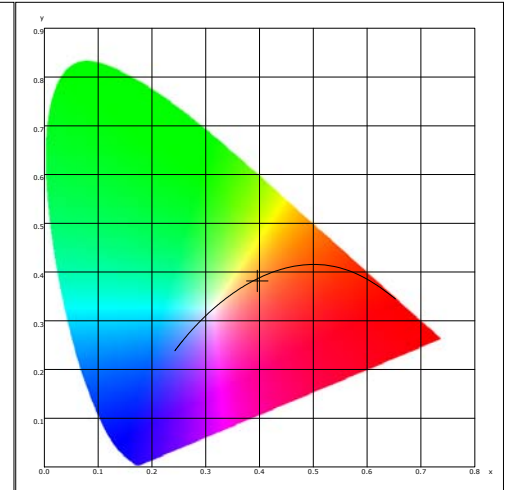

CRI

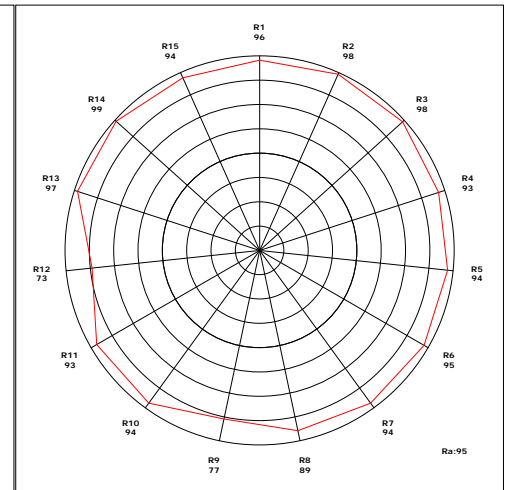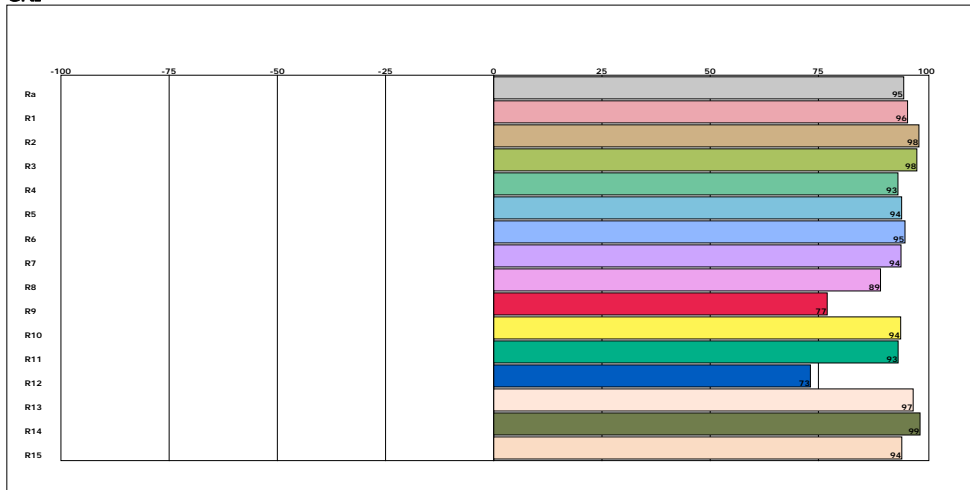

Instrument Status

Type: LMS-6000
VDark: 2455

Integral Time: 810.000ms
Scan Range: 380-780nm

VPeak: 55864
SN: 0

Remark: